


TELSTAR DOOR

(Patent pending)

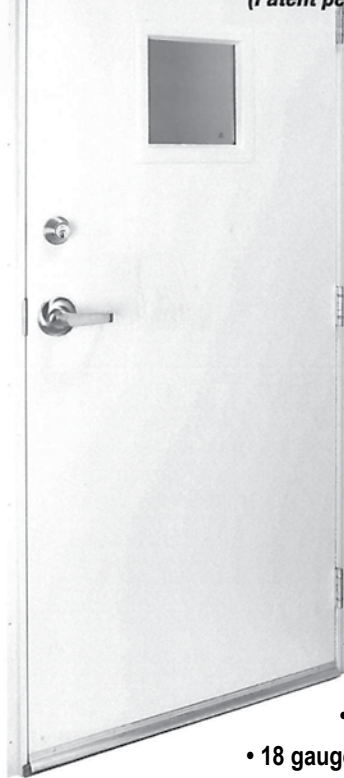


- Pre-hung door and frame assembly
- 161 lock prep
- Deadbolt ready
- ADA compliant threshold
- ASA Strike Prep
- Sweep and Seal
- Threshold flashing detaches for optional installation
- Door reinforced for closer
- Insulated core (Foam core)
- Left or right hand reverse hinge
- 20 gauge galvanized door
- 18 gauge galvanized frame
- Non-removable hinge pin
- 3 Colors Available: Grey, Bright White, Off White
- With or Without 10" x 10" Lite Kit


Telstar Wind Rating/ FLORIDA APPROVAL: FL9277 (34.5" x 79" Door)

- All Dimensions are in inches
- All wind load deflection testing completed with Tell LC2400 lockset/DB2051 Deadbolt or Tell 8300 Exit Device/CTL Lever Trim.
- Seal applied to face of soffit.
- Threshold seated to jamb with non-structural sealant.
- Assembly is to be anchored or secured to spruce/pine/fir frame with #10x1" long wood screws.
- Doors are not approved to be installed in areas requiring water penetration resistance
- Door models with 10"x10" light kit require protection if installed in wind-borne debris regions.
- Rough opening size: 36" x 80"
- Design Pressure tested to ASTM E330. Wind zone ratings calculated from IBC requirements and are for reference only. Follow all local and state code requirements specific to your application.

Design Pressure Rating		Wind Zone Rating (mph)					
		Design Pressure (psf)		Exposure B		Exposure C	
Light Kit	Hardware	+	-	Zone 4	Zone 5	Zone 4	Zone 5
none	Lockset w/deadbolt	+56	-73	170	170	150	150
none	Exit Device (Panic Bar)	+56	-45	150	140	140	120
10x10	Lockset w/deadbolt	+56	-61	170	150	150	120
10x10	Exit Device (Panic Bar)	+41	-37	140	120	120	110

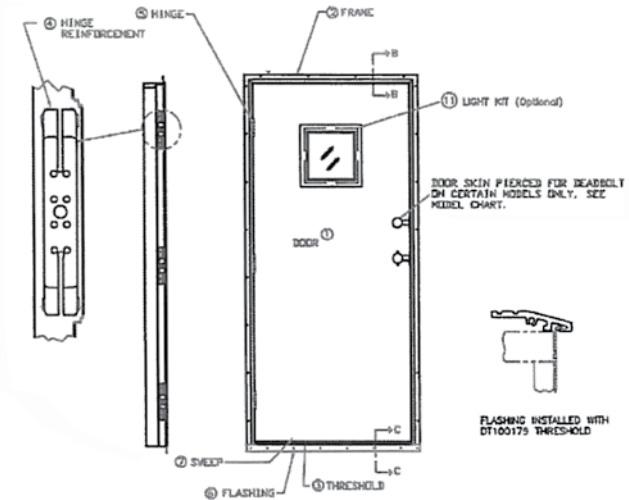

WALL SECTION

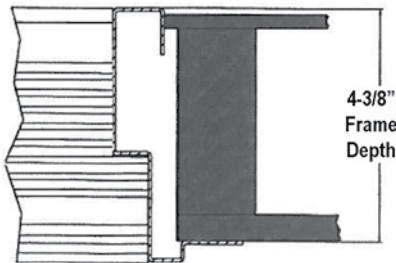

Rough Opening Information
Door Size
Exterior Surface Flange:
Interior Wall Overall Frame Size:

TELSTAR*	TELSTAR PRO	TELSTAR 70 PRO
36" x 80"	38" x 81"	38" x 85"
34-1/2"x79"x1-3/4"	35-3/4"x79-1/8" (3068)	35-3/4"x83-1/8" (3070)
38-1/2"x82-3/4" 81-1/4" without threshold flashing	40-3/8"x83-5/8" 82-1/4" without threshold flashing	40-3/8"x87-5/8" 86-1/4" without threshold flashing
35-5/8"x79-3/4"	37-3/8"x80-1/2"	37-3/8"x84-1/2"

* Wind Rated

SOUTHERN LOCK & SUPPLY CO.

P.O. Box 1980, Pinellas Park, FL 33780
(727) 541-5536 <http://www.southernlock.com>
E-mail: sales@southernlock.com

*Serving the
Industry
Since 1946.*

Toll Free Phone Numbers

- Main Florida Warehouse: 800-282-2837, Fax: 800-447-2299
- Atlanta: 877-217-9396
- Charlotte: 888-571-9145
- South Florida (Se Habla Espanol): 888-780-6071