


CAMDEN CX-ED1259L
DOOR CONTROLS **Surface Mount Rim Strike**

Camden's CX-ED1259L is a Grade 1 fire rated surface mount RIM strike that accommodates 1/2" to 3/4" latch projection and is a 'universal' strike with 12/24V, AC/DC, operation, and selectable fail safe/fail secure operation. The CX-ED1259L includes (2) spacer plates and horizontal adjustment to insure correct latch alignment in all applications.

Features:

- UL 10C/ULC 410 fire listed (3 Hr.)
- **Voltage:** 12/24 AC/DC
- **Mode:** Selectable fail safe, fail secure
- **Dynamic Strength:** 70 Ft-Lbs.
- **Dimensions:** 9" x 1-3/4" x 3/4"
- 'No Cut' surface mounted
- Single solenoid operation provides superior strike reliability
- Tamper resistant stainless steel construction
- (2) spacer plates and horizontal adjustment insure proper latch entry in all applications
- 1/2" to 3/4" latch projection
- Latch monitoring included
- Non-handed, plug-in wiring harness
- 5 Year Warranty

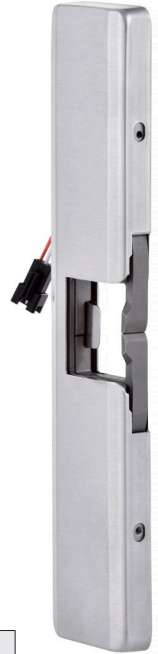

ORDER #	ITEM
167-2000	CAM CX-ED1259L-630 RIM ELEC

CM-RQE70
PIR 'Request to Exit' Detectors

Camden's PIR Detectors provide the latest word in design, with a complete list of "high performance" features.

Features:

- Compact size, designed to mount on door frames
- Easy to use on-board programming buttons. No dip switches
- (4) Factory default operating modes, with the ability to customize mode attributes
- Plug-in wiring harness, makes installation easy and fast
- Selectable fail safe/fail secure
- (2) Form 'C' contacts
- Momentary and latching relay modes
- Secondary activation device input
- Card/keypad input
- Door position switch input
- Tamper switch



ORDER #	ITEM
167-0075	CAM CM-RQE70 WHITE PIR
167-0085	CAM CM-RQE70BK BLACK PIR